TATSUO

WHEEL EXCAVATOR

JP80L-9

SCAN DISINI

https://www.tatsuo.co.id

AZARINDO

AZARINDO NUSANTARA ADITYA TRIPA

www.tatsuo.co.id | sales@tatsuo.co.id

HEAD OFFICE

Address : Margomulyo Indah Blok G4
Surabaya
Email : sales@azarindo.id
Website : www.azarindo.id

BRANCH OFFICE

BALI | JAKARTA | LAMPUNG | SAMARINDA | MAKASSAR

Hotline : 0812 2000 901

MAIN DIMENSION		Unit	
A	Total length		
	3. 5m +1.75m Boom3.5m+Bucket arm 1.75m	mm	6030
B	Total Height		
	3. 5m +1.75m Boom3.5m+Bucket arm 1.75m	mm	3005
C	Counter Weight Turning Radius	mm	1570
D	Hood Height	mm	2010
E	Counter weight Ground Clearance	mm	1090
F	Upper structure width	mm	2085
G	Cab Height	mm	2945
H	Total Tire Width	mm	2090
J	Minimum Ground Clearance	mm	280
K	Wheel Tread	mm	2260
L	Distance of swing center to rear wheel	mm	1200
M	Front Extension	mm	855
N	Back Extension	mm	376
0	The maximum reduction of the dozer blade	mm	112
P	Height of dozer blade	mm	486
Q	Maximum lift of dozer	mm	365
R	Overall width of blade	mm	2080

SPECIFICATION		Unit
Operating weight		7400kg
Bucket capacity		0.3m³
engine	Model	Yanmar 4TNV98-ZCSZLC
	Displacement	3.319L
	Rated power / speed	46.3kW/2200 rpm
	Maximum torque	223.3~243.5N. m/1600±100 rpm
Speed	Max.travel speed	30km/h
	Swing speed	10.5rpm
	Max. grade ability	30°
Hydraulic and liquid capacity	Hydraulic system	Rexroth
	Pump type	X1
	PressureP1、P2	25 MPa
	Flow rate P1、P2	158.4 L/min
	Hydraulic tank capacity	118 L
	Fuel tank capacity	170 L
	Engine fuel tank capacity	12L
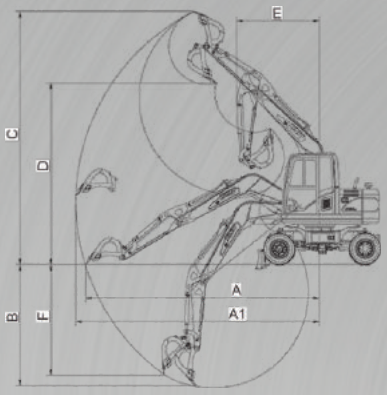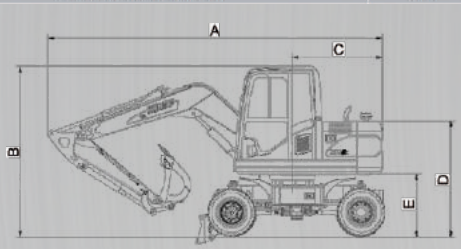
OPERATING RANGE		Unit	
Working device			3.5m +1. 75m Boom3.5m+Bucket arm 1.75m
A	Max. digging radius	mm	6345
A1	Max. digging radius on ground	mm	6610
B	Max. digging depth	mm	3650
C	Max. digging height	mm	6820
D	Max. dumping height	mm	4945
E	Minimum turning radius	mm	2330
F	Maximum vertical digging depth	mm	3055
	Bucket digging force	KN	58
	Bucket arm digging force	KN	40