TATSUO

SUGARCANE GRABBER

JP80LS-9

SCAN DISINI

https://www.tatsuo.co.id

AZARINDO

AZARINDO NUSANTARA ADITYA TRIPA

www.tatsuo.co.id | sales@tatsuo.co.id

HEAD OFFICE

Address : Margomulyo Indah Blok G4
Surabaya
Email : sales@azarindo.id
Website : www.azarindo.id

BRANCH OFFICE

| BALI | JAKARTA | LAMPUNG | SAMARINDA | MAKASSAR

| Hotline : **0812 2000 901**

MAIN DIMENSION		
	Unit	
A Total Length	mm	6660
B Total Height	mm	3092
C Counter Weight Turning Radius	mm	1567
D Hood Height	mm	2192
E Counter Weight Ground Clearance	mm	1228
F Upper Structure Width	mm	2011
G Cab Height	mm	3092
H Total Tire Width	mm	2355
J Minimum Ground Clearance	mm	377
K Wheel Tread	mm	2800
L Distance of Swing Center to Rear Wheel	mm	1665
M Front Extension	mm	1897
N Maximum Lift of Dozer Blade	mm	456

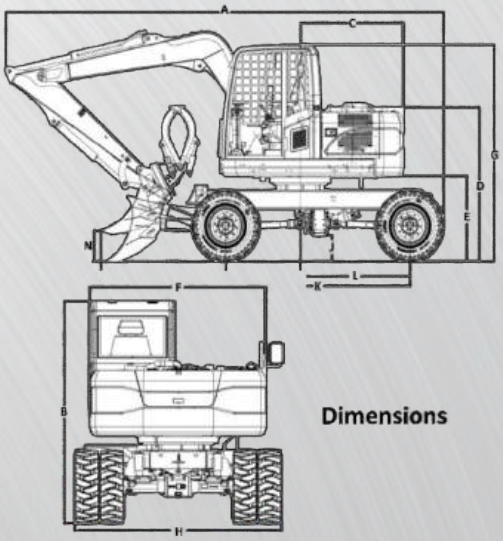

Dimensions

OPERATING RANGE		
	Unit	
A1 Max Grabbing Radius	mm	6045
B1 Max Grabbing Radius on Ground	mm	4220
C1 Max Grabbing Depth	mm	4096
D1 Minimum Turning Radius	mm	3038
E1 Maximum Clamping Tooth Width	mm	1780

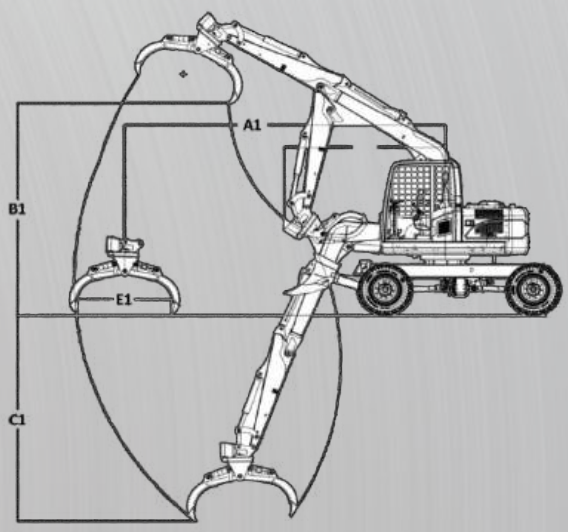

Working Range Schematic Diagram

SPECIFICATION		
Machine Weight		8900kg
Engine	Model	Cummins QSF3.8t3TC115
	Displacement	3.8L
	Rated Power/Speed	86KW/2200rpm
	Maximum Torque	470N.M
Speed	Max Travel Speed	32km/h
	Swing Speed	11rpm
	Max Grade Ability	30°
Hydraulic and Liquid Capacity	Hydraulic System	Load Sensitive
	Pump Type	Variable Stroke
	Pressure	28MPa
	Flow Rate	180L/min
	Hydraulic Oil Tank Capacity	120L
	Fuel Tank	115L